



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :  
H04B 1/10, 1/707

A1

(11) International Publication Number: WO 97/28608

(43) International Publication Date: 7 August 1997 (07.08.97)

(21) International Application Number: PCT/SE97/00132

(22) International Filing Date: 28 January 1997 (28.01.97)

(30) Priority Data:  
9600394-2 2 February 1996 (02.02.96) SE

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
(publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: FÄRJH, Jan; Wormsövägen 8, S-122 37 Enskede  
(SE).

(74) Agent: BANDELIN, Hans; Telefonaktiebolaget LM Ericsson,  
Patent and Trademark Dept., S-126 25 Stockholm (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: METHOD AND ARRANGEMENT OF SIGNAL TRACKING AND A RAKE-RECEIVER UTILIZING SAID ARRANGEMENT

(57) Abstract

The invention relates to a method for tracking closely adjacent and time-shifted signals incoming to a RAKE-receiver (25). According to the method, the sampling positions of the RAKE-branches (25a, 25b) are not permitted to come closer to one another in time than by a predetermined minimum value when updating the branches. The invention also relates to an arrangement (24) for putting the method into effect. The arrangement includes a search unit (24a), a plurality of tracking units (24c, 24d) and a processor unit (24b). The invention also relates to a RAKE-receiver utilizing said apparatus.

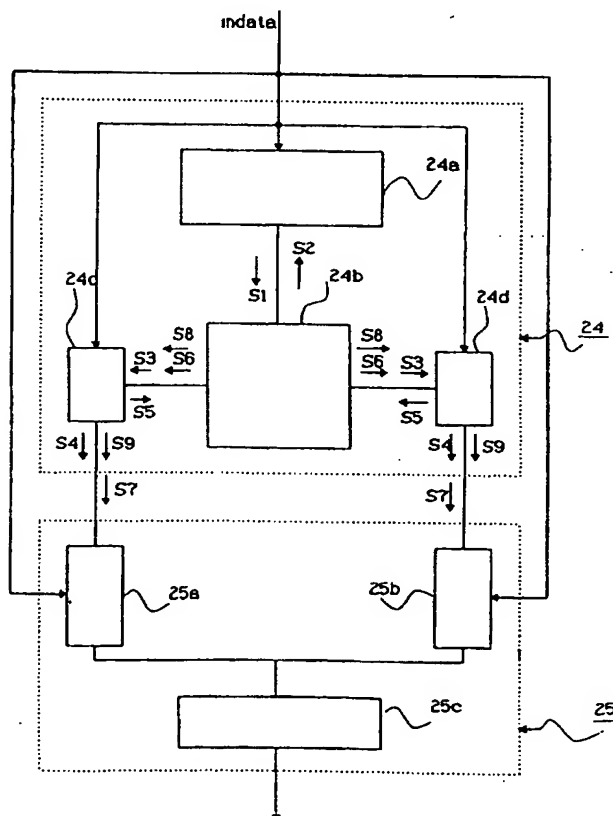

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Benin	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# METHOD AND ARRANGEMENT OF SIGNAL TRACKING AND A RAKE-RECEIVER UTILIZING SAID ARRANGEMENT

## TECHNICAL FIELD

The present invention relates to a method and an arrangement of  
5 tracking signals in a radio receiver and a RAKE-receiver  
utilizing said apparatus. More specifically, the invention  
relates to a method and an arrangement of tracking signals that  
are received by a RAKE-receiver of a CDMA-system in very close  
time-dispersed relationship, and maintaining the signal sampling  
10 positions separated in time.

## BACKGROUND OF THE INVENTION

In a mobile radio system, the existance of such signal  
reflecting surfaces as walls, building structures, hills,  
mountains etc. are liable to cause the receiver of a radio  
15 signal perceiving the signals to be dispersed in time, wherewith  
signals that carry the same information will arrive at the  
receiver at different time delays. For instance, the signals  
received may comprise a strongly dominant signal component, e.g.  
a direct wave, and weaker reflected signals belonging to the  
20 dominant signal component, so-called rays, or a spread of rays  
of essentially uniform strength. In general, there exists a ray  
which is stronger than the remaining rays and this ray can then  
be considered as the main ray.

Time dispersion is generally disadvantageous, since the signals  
25 are able to interfere with one another and therewith create  
interference fading. Time dispersion can, however, also be of  
benefit. The reflected signals transmit the same information as  
the main signal. When fading has caused pronounced attenuation

of the main signal itself, the main signal can be "reconstructed" or amplified by constructive addition of the time-dispersed rays, i.e. the signal becomes diversity amplified.

5

A RAKE-receiver is a radio receiver which utilizes this feature of time dispersed signals. The RAKE-receiver includes a plurality of independent receiver units, so-called RAKE-branches, each of which receives and tracks, or locates, a  
10 respective ray. The RAKE-receiver also includes means for combining the received signals, and means for delaying these signals so that they will be brought into phase prior to combining the signals. In order to be able to utilize diversity it is necessary to detect a plurality of incoming time-dispersed  
15 rays, which places commensurate demands on the resolution sensitivity of the receiver.

Receivers for multi-path spread rays based on the RAKE-principle are known from US-patent specification 5 305 349, and 5 237 586, and from International patent application WO94/28640. These  
20 publications describe various ways of combining the received signals to obtain diversity amplified output signals. In the known RAKE-receivers, the RAKE-branches each track respective rays independently of one another. The drawback with the known RAKE-receivers is that when two incoming rays are located so  
25 close together that the RAKE-receiver is unsuccessful in resolving the signals, each of the two branches responsible for tracking a respective ray will track one and the same ray, so that one of the rays will not be tracked.

The published patent application GB 2 286 509A describes a  
30 method of measuring the impulse response of a received signal in

a radio system. The receiver may operate in accordance with the RAKE-principle. The maximum and minimum impulse-response values are measured by a separate receiver and stored in a memory. The time-setting of the branches of the RAKE-receiver are controlled  
5 in accordance with the stored values. When the time distance between two mutually adjacent maxima is smaller than a predetermined threshold value, only one of the maximum instants is used to determine the time setting of the branches. The other signal is not then tracked. This is a disadvantage, because the  
10 diversity cannot be utilized.

#### SUMMARY OF THE INVENTION

The present invention is concerned with the problem of how to track time-dispersed rays incoming to a RAKE-receiver in very close succession individually so as to enable frequency  
15 diversity to be utilized. When two rays incoming to a RAKE-receiver have very little time dispersion in relation to one another, the receiver may perceive the two rays as being only one single ray. The RAKE-receiver is unable to resolve rays of all incoming densities, meaning that the frequency diversity  
20 between the two rays will be lost.

Furthermore, the bit error rate of the receiver output signal will be greater when two incoming rays cannot be separated from one another.

In the earlier known RAKE-receivers, each branch shall endeavour  
25 to track its allocated ray irrespective of the sampling positions of the remaining branches. This can result in one or more branches confusing its ray with another ray that arrives at the receiver at almost the same time. This means that certain

rays will not be tracked and that the anticipated diversity gain will not be obtained.

One object of the inventive method is thus to control ray tracking in a manner which will avoid losing the tracking of a ray that can contribute to the diversity gain.

According to the present invention, the aforesaid problems are solved by ensuring that the branch sampling positions are not brought too close together when updating, and, if this occurs by forcing the branch sampling positions apart. In this way, frequency diversity between the rays is obtained and the quality of the output signal is improved.

More specifically, the problem is solved by detecting and correlating incoming signals, and initiating the RAKE-receiver branches with appropriate sampling positions when good correlation is obtained. The updating values are determined prior to updating the branch sampling positions. Before actually updating these sampling positions, a check is made to ascertain that the time distance between the sampling position updating values determined with respect to two branches is sufficiently large. If this is not the case, the branches are forced to take sampling positions that are sufficiently separated in time.

The advantage afforded by the inventive method is that rays which arrive at a RAKE-receiver in a very dense sequential relationship can be tracked by maintaining their sampling positions separated in time and therewith enable the frequency diversity between the rays to be utilized.

Another advantage is that the signal quality of the output signals from the RAKE-receiver are improved, because the bit

error content of the received baseband signal will be lower than if the inventive method had not been applied.

The invention will now be described in greater detail with reference to preferred exemplifying embodiments thereof and also  
5 with reference to the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1a and 1b are diagrammatic illustrations of two time-dispersed signals.

10 Figure 2 is a block schematic illustrating part of a CDMA-system including a RAKE-receiver and an inventive arrangement.

Figure 3 is a block schematic illustrating an inventive arrangement.

15 Figure 4a-c are diagrams of the so-called early/late-algorithm used when applying the inventive method.

Figures 5a-d illustrate three separating strategies applied when using the inventive method.

Figure 6 is a flowchart illustrating the inventive method.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 Figures 1a-b are diagrams illustrating two rays that have been received by a RAKE-receiver very close together in phase according to a known technique. In the illustrated case, there is no control of the allocated branch sampling positions. Branch 1 of the RAKE-receiver shall track ray 1 and branch 2 shall  
25 track ray 2 independently of one another. Figure 1a shows the two signals and the original branch sampling positions  $P_1$  and  $P_2$ . In the illustrated case, the time distance  $\Delta p$  between these positions is too small for the rays to be resolved by the RAKE-receiver. Figure 1b shows the total signal received in the

present case, with ray 1 and ray 2 in phase. Because the two signals appear to be only one signal when received by the receiver, the two signals cannot be resolved in the illustrated case.

5

If, when updating, the branches are allocated new sampling values according to a so-called early/late-algorithm (described in more detail below), the two signals will be allocated the optimal sampling positions  $p_{12}$  corresponding to the peak of the  
10 total signal (see the Figure). They will thus adopt the same position and after having taken this position the branches will then both track solely one ray in time. Tracking of the other ray is lost in this case, and therewith the frequency diversity.

The situation would have been different if the same signals, ray  
15 1 and ray 2, had been received just as densely as in the illustrated case but in counterphase. It would then have been possible to distinguish two peaks and therewith enable the two signals to be resolved.

Figure 2 is a block schematic illustrating part of a mobile  
20 radio system which includes a RAKE-receiver which utilizes the inventive method. A signal received by an antenna 21 arrives at a tracking block 24, which implements the inventive method, and a RAKE-receiver 25, subsequent to radio frequency division in block 22 and A/D-conversion in block 23. The RAKE-receiver 25  
25 includes a number of receiving units, so-called branches 25a, 25b, and means 25c for combining the branch output signals. When signals arrive at the RAKE-receiver 25 at different arrival times, each of the signals is received separately by respective branches 25a, 25b. The sampling position allocation of the  
30 branches is controlled and checked from the tracking block 24,



in accordance with the inventive method. The signals from the various RAKE-branches are then combined in the combining means 25c in accordance with a known technique, so as to obtain an output signal for further processing in the CDMA-system.

5 Figure 3 is a block schematic illustrating the components of the tracking block and shows how said block is connected to the RAKE-branches. The tracking block 24 of Figure 2 and illustrated in Figure 3 includes a search unit 24a, a processor unit 24b and two tracking units 24c and 24d. These units are mutually  
10 connected by means of two-directional bus connections with the signal flows  $S_1$ - $S_9$ , illustrated in Figure 3 and described in more detail below.

The search unit 24a and the two tracking units 24c, 24d are comprised of signal processors. In particular, the search unit  
15 24a is a correlator which correlates an incoming signal with a code sequence known in the receiver for detecting correct signals incoming to the RAKE-receiver. The search unit 24a and the two tracking units 24c and 24d are controlled by an algorithm from the process unit 24b, as described in more detail  
20 below.

Although the tracking block 24 has been shown divided in Figure 3 into the aforesaid units, in order to improve clarity, it will be understood that the tracking block 24 may be designed as one single integrated circuit (ASIC). The arrangement may also  
25 include more than one search unit. These search units then search at different time intervals, to increase the speed of the search.

As shown in Figure 3, the RAKE-receiver 25 of Figure 2 includes the two branches 25a and 25b and the combining means 25c. Each  
30 of the branches 25a and 25b is connected to a respective

tracking unit 24c and 24d, and the combining means 25c is connected to a downstream unit in the CDMA-system (not shown).

As before described, a multi-path spread signal is comprised of a number of mutually time-shifted rays, wherein the ray that is received first and has travelled the shortest path to the receiver can be considered as being the main ray. The main ray may be the direct ray that has not been spread, or a ray that has been spread by some form of object when the direct ray has been attenuated out. The first incoming signal having a signal strength which exceeds a predetermined minimum strength,  $M_{\min}$ , is received by the search unit 24a in the tracking block 24. The search unit 24a searches for a time interval within which one or more echoes (rays) of the main ray can be expected to be found.

The search unit 24a correlates input data with the correct code sequency at different time points, and a signal peak is obtained when a signal is found. Otherwise only noise is obtained. A decision that the correct signal has been received is made by the processor unit 24b on the basis of information, signal  $S_1$ , derived from the correlation in the search unit 24a. The processor unit 24b then informs the search unit 24a of its decision, signal  $S_1$ , and the search unit 24a continues to search for more rays. The search unit 24c or 24d functions to provide a branch 25a, 25b with its sampling positions, and if the correlation is good indicating that a ray has been found, tracking of the signal is commenced by virtue of the processor unit 24b initiating the tracking unit with sampling start positions, signal  $S_3$ . The tracking units 24c and 24d then command their respective branches 25a and 25b, signal  $S_4$ , to sample the first values at their start positions.

Before each updating of the sampling position of its branches 25a or 25b, a tracking unit 24c or 24d will first determine the best sampling value around the signal peak of the signal to be tracked. In the illustrated case, it is assumed that the search  
5 unit 24a finds two rays and that, accordingly, the processor unit 24b initiates both tracking units 24c, 24d with appropriate sampling positions for the two branches 25a and 25b respectively.

Before updating the sampling positions of the branches 25a, 25b,  
10 the tracking units 24c, 24d determine the updating values of sampling positions according to an early/late-algorithm illustrated in Figures 4a-c. This algorithm is stored in the tracking units 24c and 24d. The signal strength is determined at two different positions, firstly in a position earlier than the  
15 sampling positions concerned and secondly in a position later than said sampling position.

In Figure 4a, the earlier position is referenced  $T_e$ , the current or prevailing position is referenced  $T_0$  and the later position is referenced  $T_1$ . The strength of the signal at these time  
20 points is referenced  $M_e$ ,  $M_0$  and  $M_1$  respectively. The sampling position updating value is determined as the position in which the strongest signal strength is measured. When the strongest signal strength is measured in the current sampling position  $T_0$ , this position is maintained until the next updating occasion  
25 when the same procedure is carried out. This case is shown in Figure 4c. In other cases, the sampling position is moved either to the position  $T_e$  or the position  $T_1$  in which the strongest signal strength is measured. In the case of the Figure 4a illustration, the strongest signal strength is measured in the  
30 later position  $T_1$  and consequently the updating value of the

sampling position  $T_n$  is in this case shifted to the later position  $T_1$ , as shown in Figure 4b. The updating values for the sampling positions  $T_1$  and  $T_2$  for the two branches 25a and 25b are determined in this way.

5 Before actually updating the sampling positions of the branches 25a, 25b with the updating values  $T_1$  and  $T_2$  determined by the early/late-algorithm, the processor unit 24b is informed by the tracking units 24c and 24d of the result of the performed early/late-algorithm signal  $S_5$ . The processor unit compares the  
10 time difference between the two updating values of sampling positions  $|T_1 - T_2|$  determined for the two branches with a predetermined minimum distance  $T_{min}$ .

When the time difference between the determined sampling-position updating values is greater than the minimum distance,  
15 the processor unit 24b informs the tracking units 24c and 24d that the determined updating values are acceptable, signal  $S_6$ . The tracking units 24c, 24d then update the branches 25a, 25b with the determined updating values  $T_1$ ,  $T_2$ , signal  $S_7$ .

On the other hand, if the time difference is smaller than the  
20 minimum distance  $T_{min}$ , the processor unit 24b forces at least one tracking unit 24c, 24d to move its specified sampling position updating value so that the difference will thereafter exceed the minimum distance  $T_{min}$ , signal  $S_8$ . The specified sampling position updating values can be separated in accordance with any one of  
25 the following three strategies which involve respectively:

1. Mutually separating both updating values so as to obtain two new updating values.
2. Moving the sampling position updating value for the

branch that tracks the weakest signal away from the sampling position updating value for the strongest signal, which is maintained and unchanged. Thus, in this case, a new sampling position updating value is determined for the weakest signal.

3. Moving the sampling position updating value for the branch that tracks the strongest signal away from the sampling position updating value for the weakest signal, which is retained unchanged. Thus, in this case a new sampling position updating value is determined for the strongest signal.

Figures 5a-5d illustrate the different strategies for mutually separating the updating values of sampling positions. Figure 5a shows the optimal sampling positions  $T_1$  and  $T_2$ . In this case, the first branch 25a tracks the strongest signal and the second branch 25b tracks the weakest signal. Strategy 1 is shown in Figure 5b, with which two new sampling position  $T_1'$  and  $T_2'$  are determined. Figure 5c shows strategy 2 wherewith there is determined a new sampling position  $T_{21}'$  for the second branch 25b which tracks the weakest signal. Figure 5d shows the third strategy wherewith the sampling position for the first branch 25a that tracks the strongest signal is moved to position  $T_{11}'$ .

After separating the updating positions, the signal strength is checked at the new updating value or values of the sampling positions  $T_1'$ ,  $T_2'$ ,  $T_{12}'$ ,  $T_{21}'$ . If the signal strength  $M_1'$ ,  $M_2'$ ,  $M_{12}'$ ,  $M_{21}'$  at one position is below the predetermined minimum strength  $M_{\min}$ , the current or prevailing sampling positions are retained until the next updating occasion. If the signal strength exceeds the minimum strength in both of the sampling positions, the branches are updated with the sampling position

updating values determined in accordance with one of the aforesaid strategies, signal  $S_9$ .

The three strategies imply that the signal will not be sampled in the optimal sampling position if this would result in the branches being position too close together. Although this will result in a somewhat poorer signal value than is optimal, frequency diversity is gained instead of losing the tracking of a signal. The updating procedure is carried out continuously during a signal tracking process.

10 In the aforescribed embodiment, two rays are received by two branches. It will be understood, however, that the inventive method and inventive arrangement also function in the aforescribed manner when more than two rays are received. For instance, when three rays are found by the search unit, three  
15 tracking units will provide three branches with appropriate sampling positions. In this case, the strategies applied in mutually separating branches that lie closely adjacent one another will be slightly different than in the case of two branches. In this case, the sampling positions of the first and  
20 the second branches cannot simply be compared with one another and the sampling position of the second branch then compared with the sampling positions of the third branch. Such a comparison procedure may result in the sampling position of the second branch being moved forwards and backwards. It is  
25 therefore necessary to check both time distances independently of one another. One strategy is never to move the second branch, but only the first and the third branches if so required.

Figure 6 illustrates the different steps of an inventive method when two rays are found. Incoming signals are detected in step  
30 1, and whether or not a ray has been found is determined in step

2, by correlating received input data at different time points, step 2. If the correlation is poor (no in step 2), the search for rays is continued. If the correlation is judged to be good (yes in step 2), a ray has been found. In step 3a, tracking of the rays is commenced, by initiating a branch with a suitable sampling position start value.

In the case illustrated in Figure 6, there is found a further ray which passes through steps 1 and 2 in accordance with the foregoing. Another branch is then allocated to search for this ray, and accordingly this branch is initiated with an appropriate sampling position start value for tracking this further ray, step 3b. A sampling position updating value is determined in accordance with the earlier described early/late-algorithm, steps 4a and 4b, prior to updating the current sampling positions of the branches. This is effected by determining the signal strength in an early position upstream of the current sampling position and in a late position downstream of said current sampling position. When the signal strength in the current position is the greatest strength, this position is retained until the next updating occasion. If the signal strength is greatest in the early position, the new sampling position updating value is determined as this value. If, instead, the signal strength is greatest in the later position, this position becomes the new updating position. The updating values of the sampling positions T1 and T2 for both branches are determined in this way.

Prior to updating with the updating values determined by the early/late-algorithm, a check is made to ascertain that these values are sufficiently spaced in time. This check is carried out by comparing the time difference between the determined

updating positions ( $T_1$ - $T_2$ ) with a predetermined smallest distance  $T_{\min}$ , step 5. If the time difference is greater than the smallest permitted distance, (yes in step 5), the branches are updated with the determined sampling positions  $T_1$  and  $T_2$ , step 5 6a and 6b. If the time difference is smaller (no in step 5), at least one updating value is moved to another sampling position, so that the distance between the thus determined positions is greater than the smallest permitted distance, step 7.

Separation of the sampling position updating values is effected 10 in accordance with one of the earlier described separation strategies. A check is then made to ascertain whether or not the signal strength at the position that has been moved is higher than the lowest permitted signal strength  $M_{\min}$ , steps 8a and 8b. If the signal strength is too low (no in steps 8a and 8b), the 15 current sampling positions are retained until the next updating occasion. If the signal strength is acceptable, (yes in steps 8a and 8b), the branches are updated with the sampling positions determined in step 7, steps 9a and 9b.

As beforementioned, the method can be applied with more than two 20 incoming time-shifted signals. According to simulations, a suitable minimum distance  $T_{\min}$  may be of the order of one chip duration. When practicing earlier known techniques, the RAKE-receiver has been unable to resolve signals that follow one another at such densities, and hence frequency diversity has 25 been lost. The inventive method thus improves the quality of the received baseband signal.



## CLAIMS

1. A method of tracking signals incoming to a radio receiver in very close succession and comprising a main ray and a plurality of rays that are time-shifted in relation to the main ray, comprising searching (1) for signals and detecting (2) at least two rays which carry the same information and which arrive at the receiver in time shifted relationship with one another, characterized by  
initiating (3a, 3b) separate tracking of each of the detected rays;  
determining (4a, 4b) a respective updating value of the sampling position for each tracked ray;  
determining (5) the time difference between two mutually adjacent sampling position updating values;  
comparing (5) said time difference with a predetermined minimum value; and  
changing (7) at least one of said updating values in accordance with said time difference, such that the time difference between the sampling positions will thereafter be greater than the minimum value.
2. A method according to Claim 1, characterized by continuously updating (6a, 6b, 9a, 9b) said updating values.
3. A method according to Claim 1 or Claim 2, characterized in that determination (4a, 4b) of a respective updating value includes calculating the signal strength in the current sampling position of a tracked ray and in two separated sampling positions of which one position is earlier than the current value of the sampling position and the other position is later than the current value of the sampling position;

and in that the updating value is determined as that position of said three sampling positions in which the best signal strength has been obtained.

4. A method according to Claim 3, **characterized** by updating (6a, 6b) with the determined updating values of sampling positions when the time difference between these updating values is greater than the predetermined minimum value.

5. A method according to Claims 1-4, **characterized** by changing (7) at least one of said updating values when the time difference between the determined updating value is smaller than the predetermined minimum value.

6. A method according to Claim 5, **characterized** by determining (7) the new updating values for both rays when the updating values of the sampling positions lie closer together in time than the predetermined minimum value, such that the time difference between the new updating values is greater than the predetermined minimum value.

7. A method according to Claim 5, **characterized** by determining (7) a new updating value of the sampling position for the weakest ray when the updating values lie closer together in time than the predetermined minimum value, so that the time difference between the new updating value for the weakest ray and the updating value for the strongest ray will be greater than the predetermined minimum value.

8. A method according to Claim 5, **characterized** by determining (7) a new updating value of the sampling position for the strongest ray when the time difference between the updating values of sampling positions lie closer to one another in time

than the predetermined minimum value, so that the time difference between the new updating value for the strongest ray and the updating value for the weakest ray will be greater than the predetermined minimum value.

- 5 9. A method according to any one of Claims 5-8, characterized by calculating (8a, 8b) the signal strength at the new updating values of sampling positions; comparing (8a, 8b) said signal strength with a predetermined minimum strength;
- 10 reinitiating (3a, 3b) with the current values of the sampling positions when the signal strength is smaller than the minimum signal strength; and updating (9a, 9b) the sampling positions with the determined updating values when the signal strength is greater than the
- 15 predetermined minimum strength.

10. A method according to Claims 1-9, characterized in that the predetermined minimum value is one chip duration.

11. An arrangement for tracking rays incoming to a radio receiver in very close succession, comprising at least one
- 20 search unit (24a) which functions to search input data within a given time interval and to correlate the received input data at different time points, a plurality of tracking units (24b, 24c) which function to determine the updating values for the current sampling positions and to continuously update the current
- 25 sampling values, and a processor unit (24b), characterized in that the processor unit (24b) is constructed
- a) to decide whether the correlation of input data is good or bad, wherein the search unit (24a) is ordered to continue its search for incoming rays when the correlation is bad, and a

tracking unit (24c, 24d) is initiated with a sampling position start value when the correlation is good;

b) to determine the time difference between two mutually adjacent updating values of sampling positions, wherein said  
5 time difference is compared with a predetermined minimum distance, and wherein at least one of the tracking units (24c, 24d) is ordered to shift its sampling position updating value when said time difference is smaller than the predetermined minimum value; and

10 c) to check that the signal strength in each determined updating position is greater than a predetermined minimum strength.

12. An arrangement according to Claim 11, **characterized** in that the search unit (24a) includes a signal processor and a plurality of correlators.

15 13. An arrangement according to Claim 11, **characterized** in that the tracking unit (24c, 24d) includes a signal processor.

14. An arrangement according to Claim 11, **characterized** in that the search unit (24a) and the tracking units (24c, 24d) are connected to the processor unit (24b) by means of two-  
20 directional bus connections.

15. A RAKE-receiver (25) which utilizes the arrangement according to Claims 11-14, comprising a plurality of free-standing receiver units, so-called RAKE-branches (25a, 25b), **characterized** in that each branch (25a, 25b) is connected to a  
25 respective tracking unit (24c, 24d); and in that the allocation of sampling position updating values to the branches (25a, 25b) is controlled by the tracking units (24c, 24d).

1/6

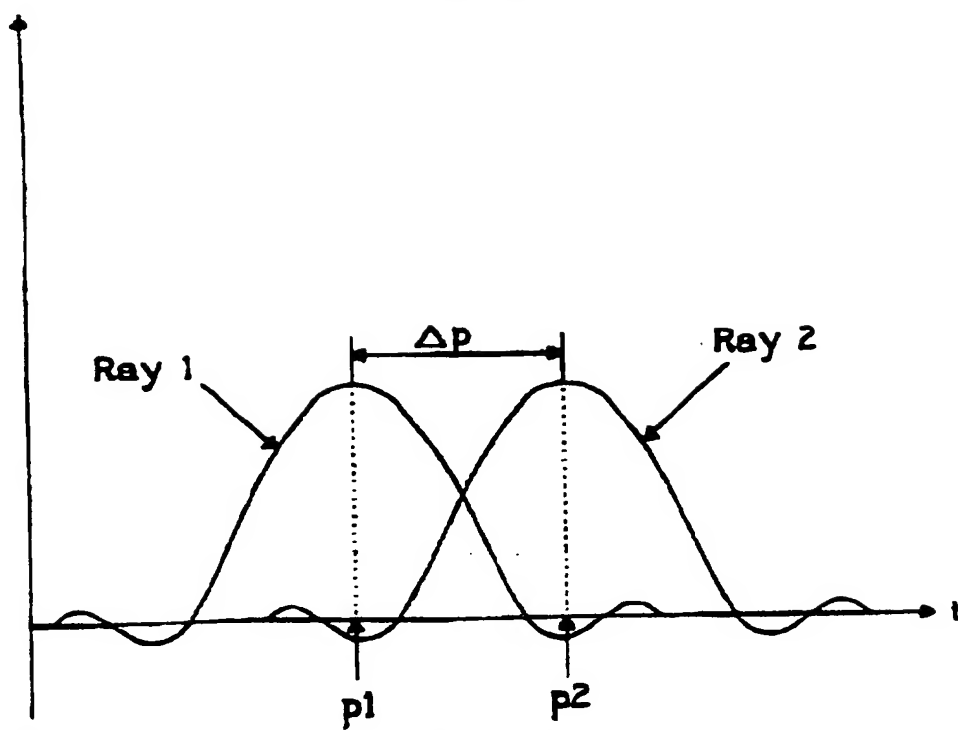


FIG 1a

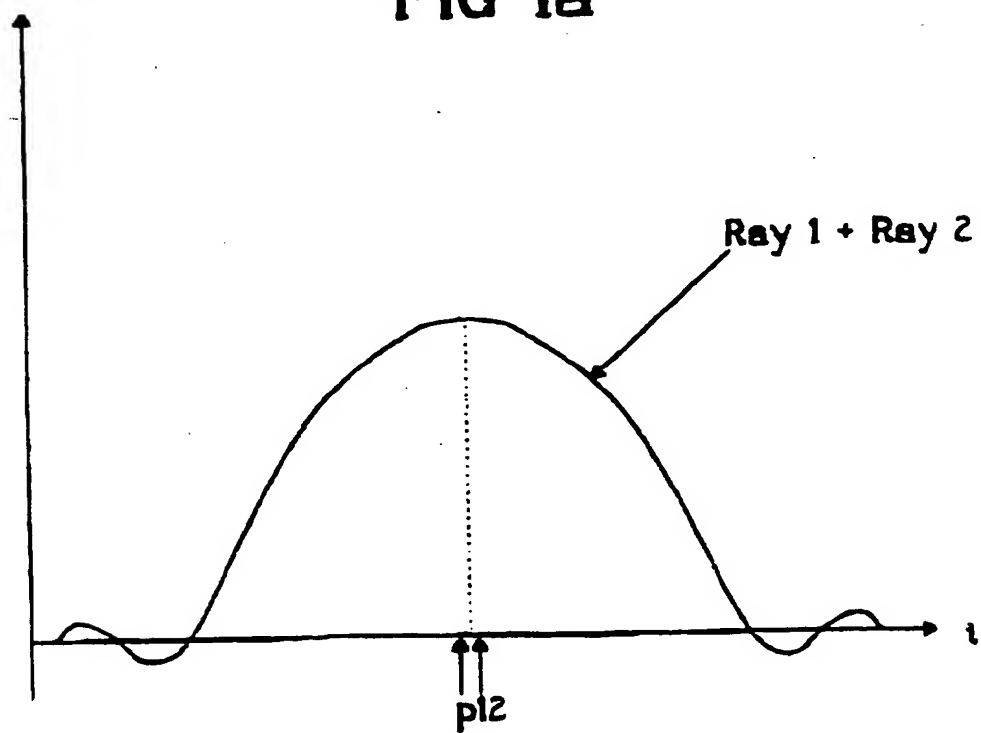


FIG 1b

2/6


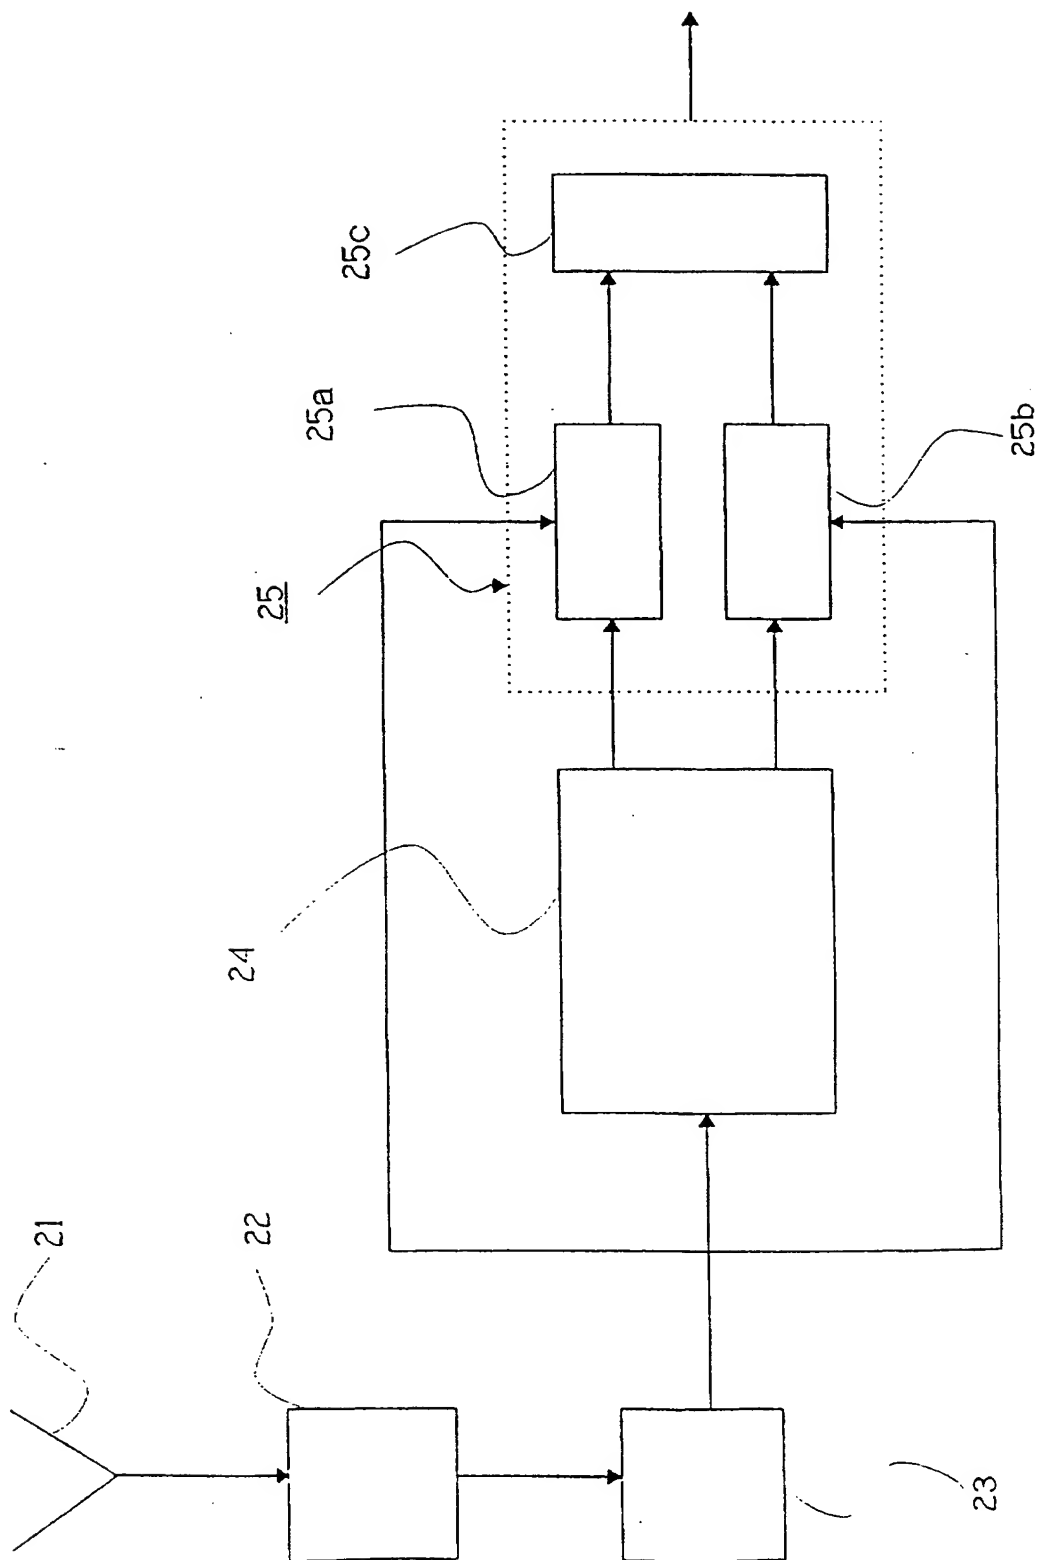


FIG 2

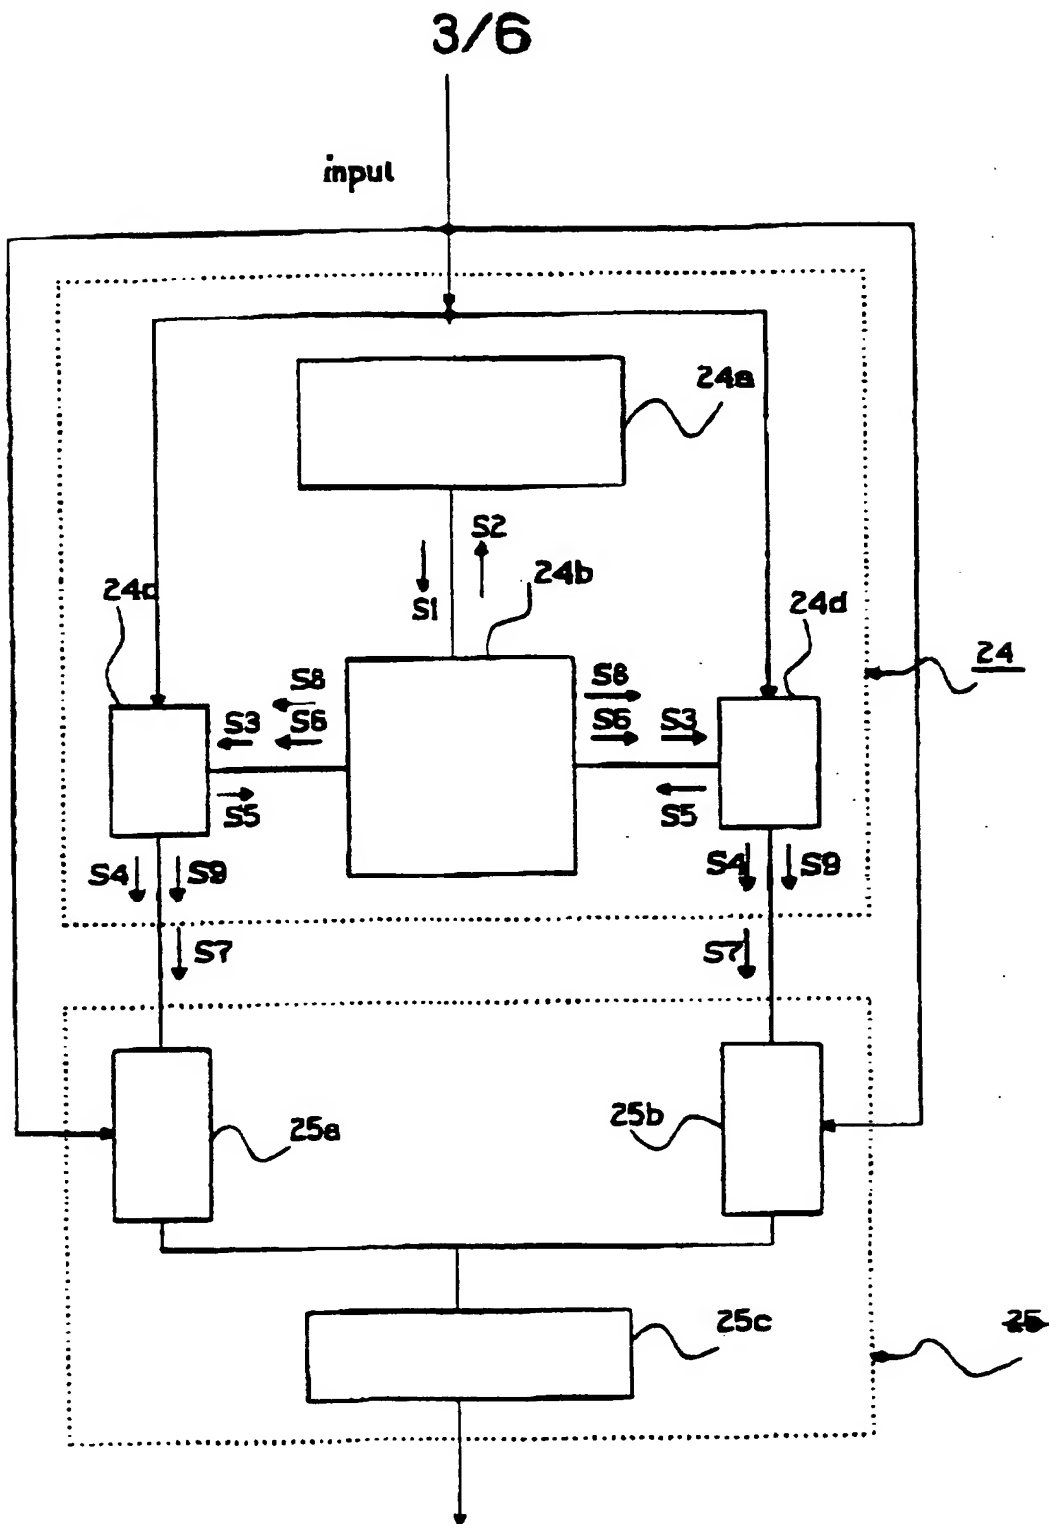

4/6

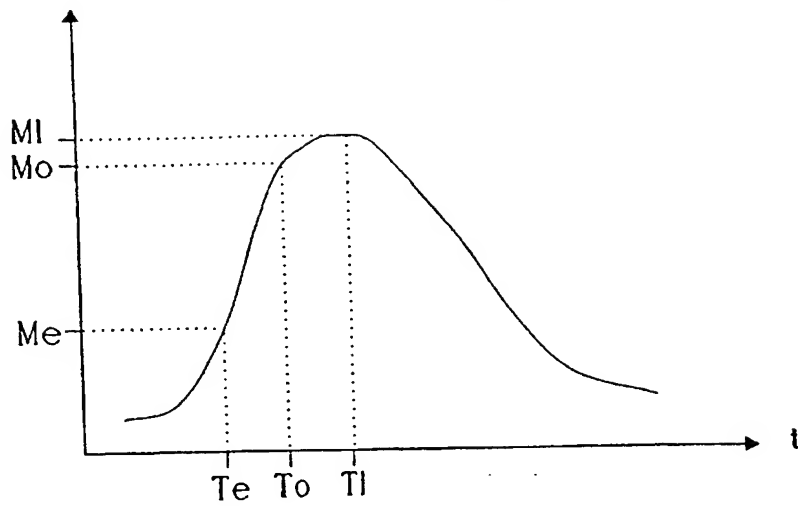


FIG 4a

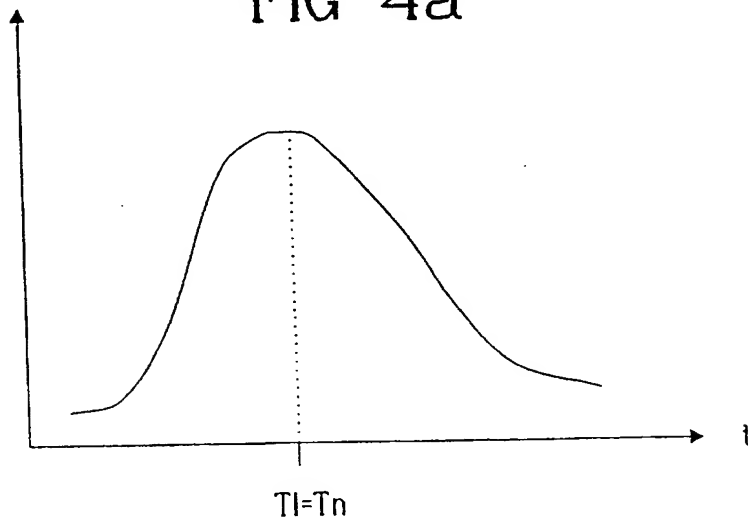


FIG 4b

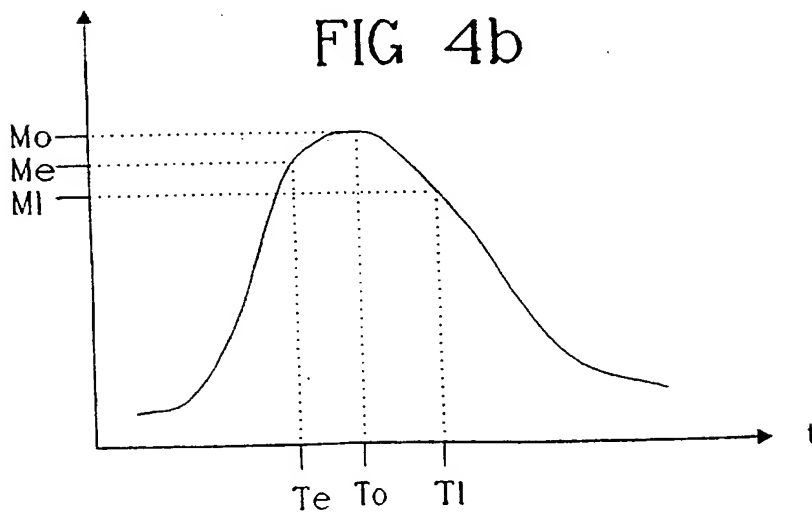


FIG 4c



5/6

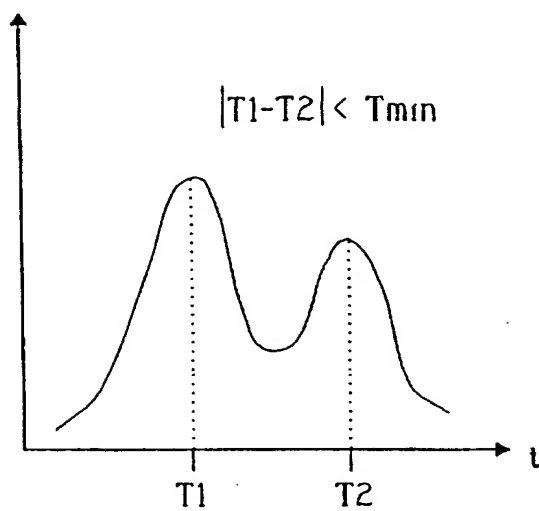


FIG 5a

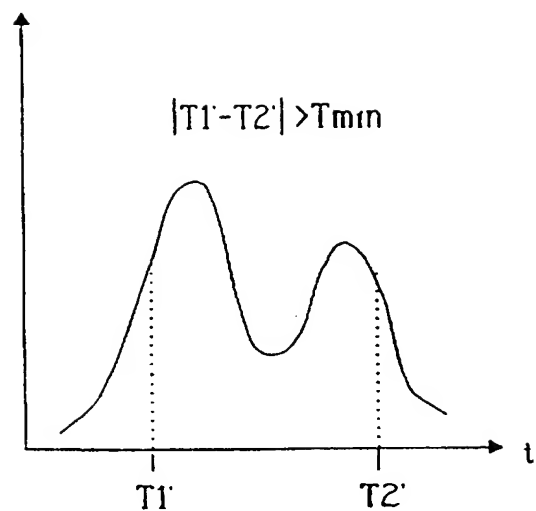


FIG 5b

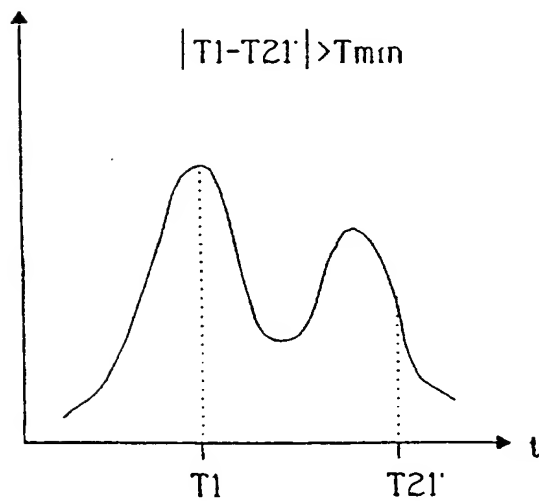


FIG 5c

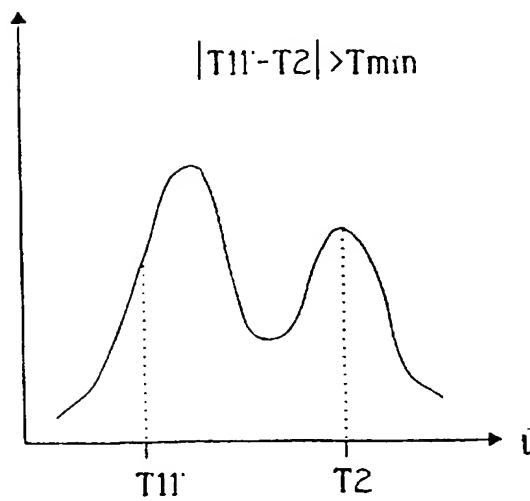


FIG 5d

6/6

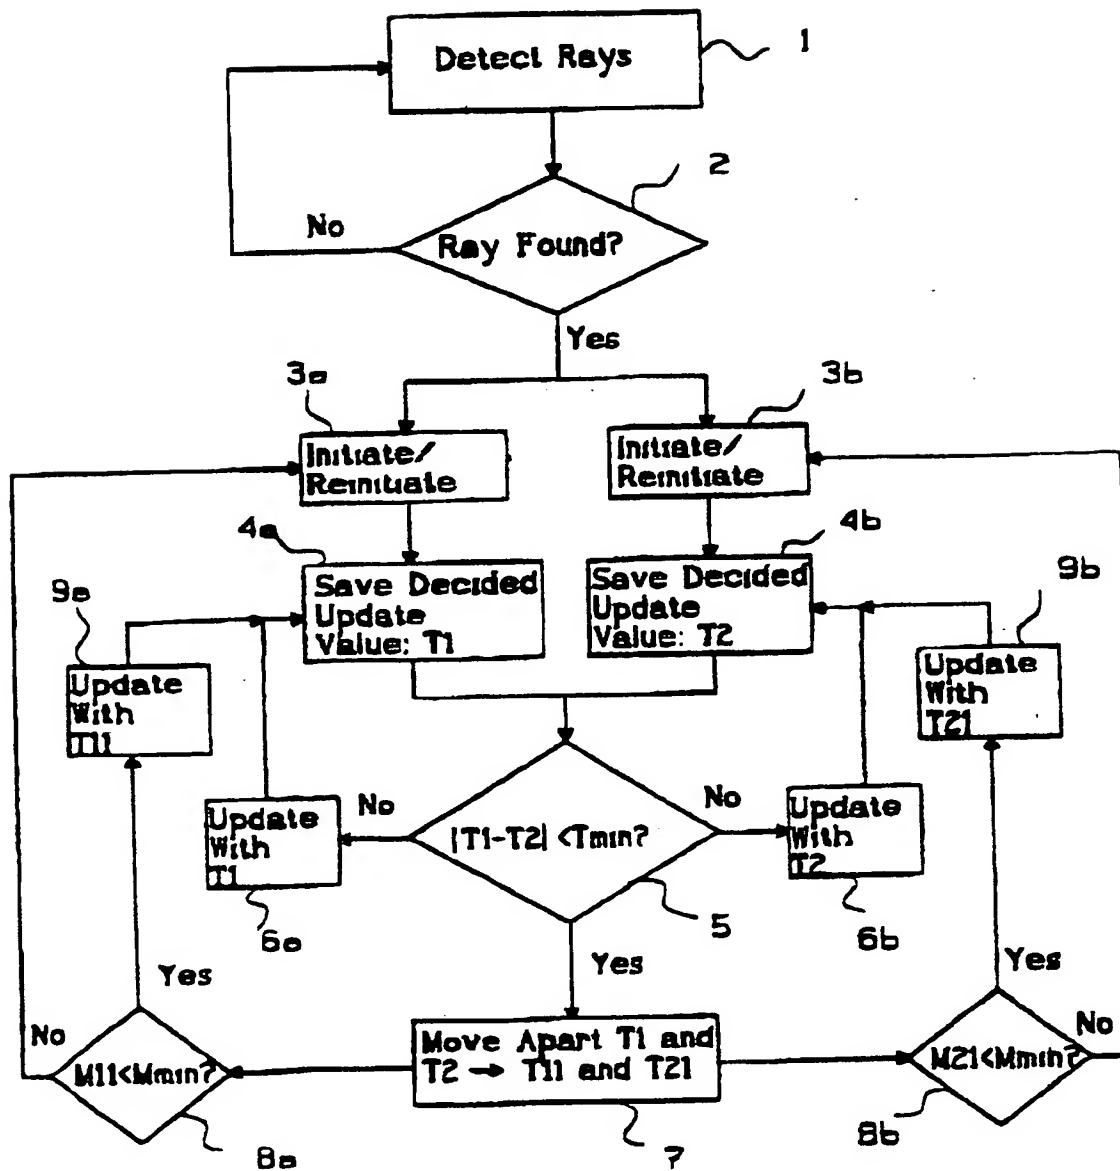


FIG 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00132

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 1/10, H04B 1/707

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0691754 A2 (NOKIA MOBILE PHONES LTD.), 10 January 1996 (10.01.96), column 4, line 25 - line 49; column 6, line 21 - line 48, abstract  ---	1-15
A	GB 2291567 A (ROKE MANOR RESEARCH LIMITED), 24 January 1996 (24.01.96), abstract  -- -----	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

23 April 1997

Date of mailing of the international search report

08 -05- 1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Mikael Sollerhed  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/04/97

International application No.  
PCT/SE 97/00132

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0691754	A2	10/01/96	FI	943249 A	08/01/96
GB	2291567	A	24/01/96	EP	0690588 A	03/01/96
				FI	953230 A	02/01/96
				GB	9413268 D	00/00/00
				JP	8056384 A	27/02/96



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :  
H04B 1/10, 1/707

A1

(11) International Publication Number: WO 97/28608

(43) International Publication Date: 7 August 1997 (07.08.97)

(21) International Application Number: PCT/SE97/00132

(22) International Filing Date: 28 January 1997 (28.01.97)

(30) Priority Data:  
9600394-2 2 February 1996 (02.02.96) SE(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
(publ) [SE/SE]; S-126 25 Stockholm (SE).(72) Inventor: FÄRJH, Jan; Wormsövägen 8, S-122 37 Enskede  
(SE).(74) Agent: BANDELIN, Hans; Telefonaktiebolaget LM Ericsson,  
Patent and Trademark Dept., S-126 25 Stockholm (SE).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,  
HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL,  
PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA,  
UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG).  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).  
European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,  
GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ,  
CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: METHOD AND ARRANGEMENT OF SIGNAL TRACKING AND A RAKE-RECEIVER UTILIZING SAID ARRANGEMENT

## (57) Abstract

The invention relates to a method for tracking closely adjacent and time-shifted signals incoming to a RAKE-receiver (25). According to the method, the sampling positions of the RAKE-branches (25a, 25b) are not permitted to come closer to one another in time than by a predetermined minimum value when updating the branches. The invention also relates to an arrangement (24) for putting the method into effect. The arrangement includes a search unit (24a), a plurality of tracking units (24c, 24d) and a processor unit (24b). The invention also relates to a RAKE-receiver utilizing said apparatus.

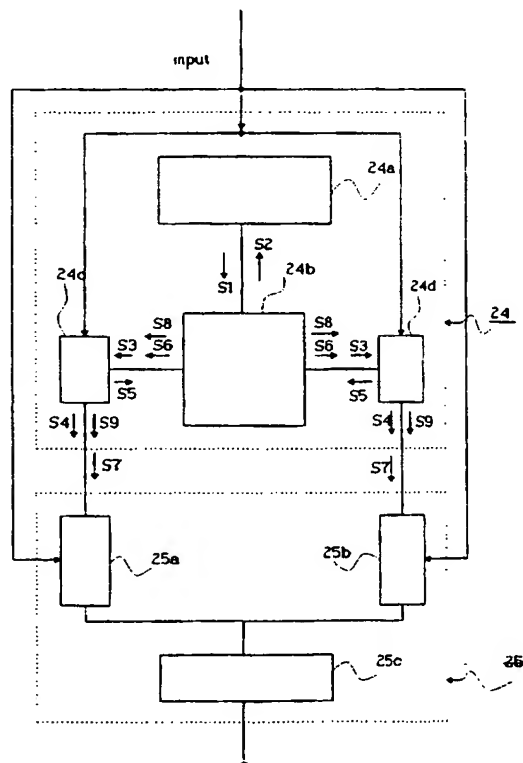

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# METHOD AND ARRANGEMENT OF SIGNAL TRACKING AND A RAKE-RECEIVER UTILIZING SAID ARRANGEMENT

## TECHNICAL FIELD

The present invention relates to a method and an arrangement of tracking signals in a radio receiver and a RAKE-receiver utilizing said apparatus. More specifically, the invention relates to a method and an arrangement of tracking signals that are received by a RAKE-receiver of a CDMA-system in very close time-dispersed relationship, and maintaining the signal sampling positions separated in time.

## BACKGROUND OF THE INVENTION

In a mobile radio system, the existance of such signal reflecting surfaces as walls, building structures, hills, mountains etc. are liable to cause the receiver of a radio signal perceiving the signals to be dispersed in time, wherewith signals that carry the same information will arrive at the receiver at different time delays. For instance, the signals received may comprise a strongly dominant signal component, e.g. a direct wave, and weaker reflected signals belonging to the dominant signal component, so-called rays, or a spread of rays of essentially uniform strength. In general, there exists a ray, which is stronger than the remaining rays and this ray can then be considered as the main ray.

Time dispersion is generally disadvantageous, since the signals are able to interfere with one another and therewith create interference fading. Time dispersion can, however, also be of benefit. The reflected signals transmit the same information as the main signal. When fading has caused pronounced attenuation

of the main signal itself, the main signal can be "reconstructed" or amplified by constructive addition of the time-dispersed rays, i.e. the signal becomes diversity amplified.

5

A RAKE-receiver is a radio receiver which utilizes this feature of time dispersed signals. The RAKE-receiver includes a plurality of independent receiver units, so-called RAKE-branches, each of which receives and tracks, or locates, a  
10 respective ray. The RAKE-receiver also includes means for combining the received signals, and means for delaying these signals so that they will be brought into phase prior to combining the signals. In order to be able to utilize diversity it is necessary to detect a plurality of incoming time-dispersed  
15 rays, which places commensurate demands on the resolution sensitivity of the receiver.

Receivers for multi-path spread rays based on the RAKE-principle are known from US-patent specification 5 305 349, and 5 237 586, and from International patent application W094/28640. These  
20 publications describe various ways of combining the received signals to obtain diversity amplified output signals. In the known RAKE-receivers, the RAKE-branches each track respective rays independently of one another. The drawback with the known RAKE-receivers is that when two incoming rays are located so  
25 close together that the RAKE-receiver is unsuccessful in resolving the signals, each of the two branches responsible for tracking a respective ray will track one and the same ray, so that one of the rays will not be tracked.

The published patent application GB 2 286 509A describes a  
30 method of measuring the impulse response of a received signal in



a radio system. The receiver may operate in accordance with the RAKE-principle. The maximum and minimum impulse-response values are measured by a separate receiver and stored in a memory. The time-setting of the branches of the RAKE-receiver are controlled  
5 in accordance with the stored values. When the time distance between two mutually adjacent maxima is smaller than a predetermined threshold value, only one of the maximum instants is used to determine the time setting of the branches. The other signal is not then tracked. This is a disadvantage, because the  
10 diversity cannot be utilized.

#### SUMMARY OF THE INVENTION

The present invention is concerned with the problem of how to track time-dispersed rays incoming to a RAKE-receiver in very close succession individually so as to enable frequency  
15 diversity to be utilized. When two rays incoming to a RAKE-receiver have very little time dispersion in relation to one another, the receiver may perceive the two rays as being only one single ray. The RAKE-receiver is unable to resolve rays of all incoming densities, meaning that the frequency diversity  
20 between the two rays will be lost.

Furthermore, the bit error rate of the receiver output signal will be greater when two incoming rays cannot be separated from one another.

In the earlier known RAKE-receivers, each branch shall endeavour  
25 to track its allocated ray irrespective of the sampling positions of the remaining branches. This can result in one or more branches confusing its ray with another ray that arrives at the receiver at almost the same time. This means that certain

rays will not be tracked and that the anticipated diversity gain will not be obtained.

One object of the inventive method is thus to control ray tracking in a manner which will avoid losing the tracking of a ray that can contribute to the diversity gain.

According to the present invention, the aforesaid problems are solved by ensuring that the branch sampling positions are not brought too close together when updating, and, if this occurs by forcing the branch sampling positions apart. In this way, frequency diversity between the rays is obtained and the quality of the output signal is improved.

More specifically, the problem is solved by detecting and correlating incoming signals, and initiating the RAKE-receiver branches with appropriate sampling positions when good correlation is obtained. The updating values are determined prior to updating the branch sampling positions. Before actually updating these sampling positions, a check is made to ascertain that the time distance between the sampling position updating values determined with respect to two branches is sufficiently large. If this is not the case, the branches are forced to take sampling positions that are sufficiently separated in time.

The advantage afforded by the inventive method is that rays which arrive at a RAKE-receiver in a very dense sequential relationship can be tracked by maintaining their sampling positions separated in time and therewith enable the frequency diversity between the rays to be utilized.

Another advantage is that the signal quality of the output signals from the RAKE-receiver are improved, because the bit

error content of the received baseband signal will be lower than if the inventive method had not been applied.

The invention will now be described in greater detail with reference to preferred exemplifying embodiments thereof and also with reference to the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1a and 1b are diagrammatic illustrations of two time-dispersed signals.

10 Figure 2 is a block schematic illustrating part of a CDMA-system including a RAKE-receiver and an inventive arrangement.

Figure 3 is a block schematic illustrating an inventive arrangement.

15 Figure 4a-c are diagrams of the so-called early/late-algorithm used when applying the inventive method.

Figures 5a-d illustrate three separating strategies applied when using the inventive method.

Figure 6 is a flowchart illustrating the inventive method.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 Figures 1a-b are diagrams illustrating two rays that have been received by a RAKE-receiver very close together in phase according to a known technique. In the illustrated case, there is no control of the allocated branch sampling positions. Branch 1 of the RAKE-receiver shall track ray 1 and branch 2 shall  
25 track ray 2 independently of one another. Figure 1a shows the two signals and the original branch sampling positions  $P_1$  and  $P_2$ . In the illustrated case, the time distance  $\Delta p$  between these positions is too small for the rays to be resolved by the RAKE-receiver. Figure 1b shows the total signal received in the

present case, with ray 1 and ray 2 in phase. Because the two signals appear to be only one signal when received by the receiver, the two signals cannot be resolved in the illustrated case.

5

If, when updating, the branches are allocated new sampling values according to a so-called early/late-algorithm (described in more detail below) , the two signals will be allocated the optimal sampling positions  $p_{12}$  corresponding to the peak of the total signal (see the Figure). They will thus adopt the same position and after having taken this position the branches will then both track solely one ray in time. Tracking of the other ray is lost in this case, and therewith the frequency diversity.

The situation would have been different if the same signals, ray 1 and ray 2, had been received just as densely as in the illustrated case but in counterphase. It would then have been possible to distinguish two peaks and therewith enable the two signals to be resolved.

Figure 2 is a block schematic illustrating part of a mobile radio system which includes a RAKE-receiver which utilizes the inventive method. A signal received by an antenna 21 arrives at a tracking block 24, which implements the inventive method, and a RAKE-receiver 25, subsequent to radio frequency division in block 22 and A/D-conversion in block 23. The RAKE-receiver 25 includes a number of receiving units, so-called branches 25a, 25b, and means 25c for combining the branch output signals. When signals arrive at the RAKE-receiver 25 at different arrival times, each of the signals is received separately by respective branches 25a, 25b. The sampling position allocation of the branches is controlled and checked from the tracking block 24,

in accordance with the inventive method. The signals from the various RAKE-branches are then combined in the combining means 25c in accordance with a known technique, so as to obtain an output signal for further processing in the CDMA-system.

5 Figure 3 is a block schematic illustrating the components of the tracking block and shows how said block is connected to the RAKE-branches. The tracking block 24 of Figure 2 and illustrated in Figure 3 includes a search unit 24a, a processor unit 24b and two tracking units 24c and 24d. These units are mutually  
10 connected by means of two-directional bus connections with the signal flows  $S_1$ - $S_9$  illustrated in Figure 3 and described in more detail below.

The search unit 24a and the two tracking units 24c, 24d are comprised of signal processors. In particular, the search unit  
15 24a is a correlator which correlates an incoming signal with a code sequence known in the receiver for detecting correct signals incoming to the RAKE-receiver. The search unit 24a and the two tracking units 24c and 24d are controlled by an algorithm from the process unit 24b, as described in more detail  
20 below.

Although the tracking block 24 has been shown divided in Figure 3 into the aforesaid units, in order to improve clarity, it will be understood that the tracking block 24 may be designed as one single integrated circuit (ASIC). The arrangement may also  
25 include more than one search unit. These search units then search at different time intervals, to increase the speed of the search.

As shown in Figure 3, the RAKE-receiver 25 of Figure 2 includes the two branches 25a and 25b and the combining means 25c. Each  
30 of the branches 25a and 25b is connected to a respective

tracking unit 24c and 24d, and the combining means 25c is connected to a downstream unit in the CDMA-system (not shown).

As before described, a multi-path spread signal is comprised of a number of mutually time-shifted rays, wherein the ray that is received first and has travelled the shortest path to the receiver can be considered as being the main ray. The main ray may be the direct ray that has not been spread, or a ray that has been spread by some form of object when the direct ray has been attenuated out. The first incoming signal having a signal strength which exceeds a predetermined minimum strength,  $M_{\min}$ , is received by the search unit 24a in the tracking block 24. The search unit 24a searches for a time interval within which one or more echoes (rays) of the main ray can be expected to be found.

The search unit 24a correlates input data with the correct code sequency at different time points, and a signal peak is obtained when a signal is found. Otherwise only noise is obtained. A decision that the correct signal has been received is made by the processor unit 24b on the basis of information, signal  $S_1$ , derived from the correlation in the search unit 24a. The processor unit 24b then informs the search unit 24a of its decision, signal  $S_1$ , and the search unit 24a continues to search for more rays. The search unit 24c or 24d functions to provide a branch 25a, 25b with its sampling positions, and if the correlation is good indicating that a ray has been found, tracking of the signal is commenced by virtue of the processor unit 24b initiating the tracking unit with sampling start positions, signal  $S_3$ . The tracking units 24c and 24d then command their respective branches 25a and 25b, signal  $S_4$ , to sample the first values at their start positions.

Before each updating of the sampling position of its branches 25a or 25b, a tracking unit 24c or 24d will first determine the best sampling value around the signal peak of the signal to be tracked. In the illustrated case, it is assumed that the search  
5 unit 24a finds two rays and that, accordingly, the processor unit 24b initiates both tracking units 24c, 24d with appropriate sampling positions for the two branches 25a and 25b respectively.

Before updating the sampling positions of the branches 25a, 25b,  
10 the tracking units 24c, 24d determine the updating values of sampling positions according to an early/late-algorithm illustrated in Figures 4a-c. This algorithm is stored in the tracking units 24c and 24d. The signal strength is determined at two different positions, firstly in a position earlier than the  
15 sampling positions concerned and secondly in a position later than said sampling position.

In Figure 4a, the earlier position is referenced  $T_e$ , the current or prevailing position is referenced  $T_o$  and the later position is referenced  $T_l$ . The strength of the signal at these time  
20 points is referenced  $M_e$ ,  $M_o$  and  $M_l$  respectively. The sampling position updating value is determined as the position in which the strongest signal strength is measured. When the strongest signal strength is measured in the current sampling position  $T_o$ , this position is maintained until the next updating occasion  
25 when the same procedure is carried out. This case is shown in Figure 4c. In other cases, the sampling position is moved either to the position  $T_e$  or the position  $T_l$  in which the strongest signal strength is measured. In the case of the Figure 4a illustration, the strongest signal strength is measured in the  
30 later position  $T_l$  and consequently the updating value of the

sampling position  $T_n$  is in this case shifted to the later position  $T_1$ , as shown in Figure 4b. The updating values for the sampling positions  $T_1$  and  $T_2$  for the two branches 25a and 25b are determined in this way.

5 Before actually updating the sampling positions of the branches 25a, 25b with the updating values  $T_1$  and  $T_2$  determined by the early/late-algorithm, the processor unit 24b is informed by the tracking units 24c and 24d of the result of the performed early/late-algorithm signal  $S_5$ . The processor unit compares the  
10 time difference between the two updating values of sampling positions  $|T_1 - T_2|$  determined for the two branches with a predetermined minimum distance  $T_{\min}$ .

When the time difference between the determined sampling-position updating values is greater than the minimum distance,  
15 the processor unit 24b informs the tracking units 24c and 24d that the determined updating values are acceptable, signal  $S_6$ . The tracking units 24c, 24d then update the branches 25a, 25b with the determined updating values  $T_1$ ,  $T_2$ , signal  $S_7$ .

On the other hand, if the time difference is smaller than the  
20 minimum distance  $T_{\min}$ , the processor unit 24b forces at least one tracking unit 24c, 24d to move its specified sampling position updating value so that the difference will thereafter exceed the minimum distance  $T_{\min}$ , signal  $S_8$ . The specified sampling position updating values can be separated in accordance with any one of  
25 the following three strategies which involve respectively:

1. Mutually separating both updating values so as to obtain two new updating values.
2. Moving the sampling position updating value for the



branch that tracks the weakest signal away from the sampling position updating value for the strongest signal, which is maintained and unchanged. Thus, in this case, a new sampling position updating value is determined for the weakest signal.

3. Moving the sampling position updating value for the branch that tracks the strongest signal away from the sampling position updating value for the weakest signal, which is retained unchanged. Thus, in this case a new sampling position updating value is determined for the strongest signal.

Figures 5a-5d illustrate the different strategies for mutually separating the updating values of sampling positions. Figure 5a shows the optimal sampling positions  $T_1$  and  $T_2$ . In this case, the first branch 25a tracks the strongest signal and the second branch 25b tracks the weakest signal. Strategy 1 is shown in Figure 5b, with which two new sampling positions  $T_1'$  and  $T_2'$  are determined. Figure 5c shows strategy 2 where with there is determined a new sampling position  $T_{21}'$  for the second branch 25b which tracks the weakest signal. Figure 5d shows the third strategy where with the sampling position for the first branch 25a that tracks the strongest signal is moved to position  $T_{11}'$ .

After separating the updating positions, the signal strength is checked at the new updating value or values of the sampling positions  $T_1'$ ,  $T_2'$ ,  $T_{12}'$ ,  $T_{21}'$ . If the signal strength  $M_1'$ ,  $M_2'$ ,  $M_{12}'$ ,  $M_{21}'$  at one position is below the predetermined minimum strength  $M_{min}$ , the current or prevailing sampling positions are retained until the next updating occasion. If the signal strength exceeds the minimum strength in both of the sampling positions, the branches are updated with the sampling position

updating values determined in accordance with one of the  
aforesaid strategies, signal  $S_s$ .

The three strategies imply that the signal will not be sampled  
in the optimal sampling position if this would result in the  
5 branches being position too close together. Although this will  
result in a somewhat poorer signal value than is optimal,  
frequency diversity is gained instead of losing the tracking of  
a signal. The updating procedure is carried out continuously  
during a signal tracking process.

10 In the aforescribed embodiment, two rays are received by two  
branches. It will be understood, however, that the inventive  
method and inventive arrangement also function in the  
aforescribed manner when more than two rays are received. For  
instance, when three rays are found by the search unit, three  
15 tracking units will provide three branches with appropriate  
sampling positions. In this case, the strategies applied in  
mutually separating branches that lie closely adjacent one  
another will be slightly different than in the case of two  
branches. In this case, the sampling positions of the first and  
20 the second branches cannot simply be compared with one another  
and the sampling position of the second branch then compared  
with the sampling positions of the third branch. Such a  
comparison procedure may result in the sampling position of the  
second branch being moved forwards and backwards. It is  
25 therefore necessary to check both time distances independent  
of one another. One strategy is never to move the second branch  
but only the first and the third branches if so required.

Figure 6 illustrates the different steps of an inventive method  
when two rays are found. Incoming signals are detected in step  
30 1, and whether or not a ray has been found is determined in step

2, by correlating received input data at different time points, step 2. If the correlation is poor (no in step 2), the search for rays is continued. If the correlation is judged to be good (yes in step 2), a ray has been found. In step 3a, tracking of the rays is commenced, by initiating a branch with a suitable sampling position start value.

In the case illustrated in Figure 6, there is found a further ray which passes through steps 1 and 2 in accordance with the foregoing. Another branch is then allocated to search for this ray, and accordingly this branch is initiated with an appropriate sampling position start value for tracking this further ray, step 3b. A sampling position updating value is determined in accordance with the earlier described early/late-algorithm, steps 4a and 4b, prior to updating the current sampling positions of the branches. This is effected by determining the signal strength in an early position upstream of the current sampling position and in a late position downstream of said current sampling position. When the signal strength in the current position is the greatest strength, this position is retained until the next updating occasion. If the signal strength is greatest in the early position, the new sampling position updating value is determined as this value. If, instead, the signal strength is greatest in the later position, this position becomes the new updating position. The updating values of the sampling positions T1 and T2 for both branches are determined in this way.

Prior to updating with the updating values determined by the early/late-algorithm, a check is made to ascertain that these values are sufficiently spaced in time. This check is carried out by comparing the time difference between the determined

updating positions ( $T_1 - T_2$ ) with a predetermined smallest distance  $T_{\min}$ , step 5. If the time difference is greater than the smallest permitted distance, (no in step 5), the branches are updated with the determined sampling positions  $T_1$  and  $T_2$ , step 5 6a and 6b. If the time difference is smaller (yes in step 5), at least one updating value is moved to another sampling position, so that the distance between the thus determined positions is greater than the smallest permitted distance, step 7.

Separation of the sampling position updating values is effected 10 in accordance with one of the earlier described separation strategies. A check is then made to ascertain whether or not the signal strength at the position that has been moved is higher than the lowest permitted signal strength  $M_{\min}$ , steps 8a and 8b. If the signal strength is too low (no in steps 8a and 8b), the 15 current sampling positions are retained until the next updating occasion. If the signal strength is acceptable, (yes in steps 8a and 8b), the branches are updated with the sampling positions determined in step 7, steps 9a and 9b.

As beforementioned, the method can be applied with more than two 20 incoming time-shifted signals. According to simulations, a suitable minimum distance  $T_{\min}$  may be of the order of one chip duration. When practicing earlier known techniques, the RAKE-receiver has been unable to resolve signals that follow one another at such densities, and hence frequency diversity has 25 been lost. The inventive method thus improves the quality of the received baseband signal.

## CLAIMS

1. A method of tracking signals incoming to a radio receiver in very close succession and comprising a main ray and a plurality of rays that are time-shifted in relation to the main ray,  
5 comprising searching (1) for signals and detecting (2) at least two rays which carry the same information and which arrive at the receiver in time shifted relationship with one another, characterized by  
initiating (3a, 3b) separate tracking of each of the detected  
10 rays;  
determining (4a, 4b) a respective updating value of the sampling position for each tracked ray;  
determining (5) the time difference between two mutually adjacent sampling position updating values;  
15 comparing (5) said time difference with a predetermined minimum value; and  
changing (7) at least one of said updating values in accordance with said time difference, such that the time difference between the sampling positions will thereafter be greater than the  
20 minimum value.
2. A method according to Claim 1, characterized by continuously updating (6a, 6b, 9a, 9b) said updating values.
3. A method according to Claim 1 or Claim 2, characterized in that determination (4a, 4b) of a respective updating value  
25 includes calculating the signal strength in the current sampling position of a tracked ray and in two separated sampling positions of which one position is earlier than the current value of the sampling position and the other position is later than the current value of the sampling position;

and in that the updating value is determined as that position of said three sampling positions in which the best signal strength has been obtained.

4. A method according to Claim 3, **characterized** by updating (6a, 6b) with the determined updating values of sampling positions when the time difference between these updating values is greater than the predetermined minimum value.

5. A method according to Claims 1-4, **characterized** by changing (7) at least one of said updating values when the time difference between the determined updating value is smaller than the predetermined minimum value.

6. A method according to Claim 5, **characterized** by determining (7) the new updating values for both rays when the updating values of the sampling positions lie closer together in time than the predetermined minimum value, such that the time difference between the new updating values is greater than the predetermined minimum value.

7. A method according to Claim 5, **characterized** by determining (7) a new updating value of the sampling position for the weakest ray when the updating values lie closer together in time than the predetermined minimum value, so that the time difference between the new updating value for the weakest ray and the updating value for the strongest ray will be greater than the predetermined minimum value.

8. A method according to Claim 5, **characterized** by determining (7) a new updating value of the sampling position for the strongest ray when the time difference between the updating values of sampling positions lie closer to one another in time

than the predetermined minimum value, so that the time difference between the new updating value for the strongest ray and the updating value for the weakest ray will be greater than the predetermined minimum value.

- 5 9. A method according to any one of Claims 5-8, characterized by calculating (8a, 8b) the signal strength at the new updating values of sampling positions;  
comparing (8a, 8b) said signal strength with a predetermined minimum strength;  
10 reinitiating (3a, 3b) with the current values of the sampling positions when the signal strength is smaller than the minimum signal strength; and  
updating (9a, 9b) the sampling positions with the determined updating values when the signal strength is greater than the  
15 predetermined minimum strength.

10. A method according to Claims 1-9, characterized in that the predetermined minimum value is one chip duration.

11. An arrangement for tracking rays incoming to a radio receiver in very close succession, comprising at least one  
20 search unit (24a) which functions to search input data within a given time interval and to correlate the received input data at different time points, a plurality of tracking units (24b, 24c) which function to determine the updating values for the current sampling positions and to continuously update the current  
25 sampling values, and a processor unit (24b), characterized in that the processor unit (24b) is constructed

a) to decide whether the correlation of input data is good or bad, wherein the search unit (24a) is ordered to continue its search for incoming rays when the correlation is bad, and a

tracking unit (24c, 24d) is initiated with a sampling position start value when the correlation is good;

- b) to determine the time difference between two mutually adjacent updating values of sampling positions, wherein said time difference is compared with a predetermined minimum distance, and wherein at least one of the tracking units (24c, 24d) is ordered to shift its sampling position updating value when said time difference is smaller than the predetermined minimum value; and
- 10 c) to check that the signal strength in each determined updating position is greater than a predetermined minimum strength.

12. An arrangement according to Claim 11, characterized in that the search unit (24a) includes a signal processor and a plurality of correlators.

- 15 13. An arrangement according to Claim 11, characterized in that the tracking unit (24c, 24d) includes a signal processor.



14. An arrangement according to Claim 11, characterized in that the search unit (24a) and the tracking units (24c, 24d) are connected to the processor unit (24b) by means of two-directional bus connections.

20

15. A RAKE-receiver (25) which utilizes the arrangement according to Claims 11-14, comprising a plurality of free-standing receiver units, so-called RAKE-branches (25a, 25b), characterized in that each branch (25a, 25b) is connected to a respective tracking unit (24c, 24d); and in that the allocation of sampling position updating values to the branches (25a, 25b) is controlled by the tracking units (24c, 24d).
- 25



1/6

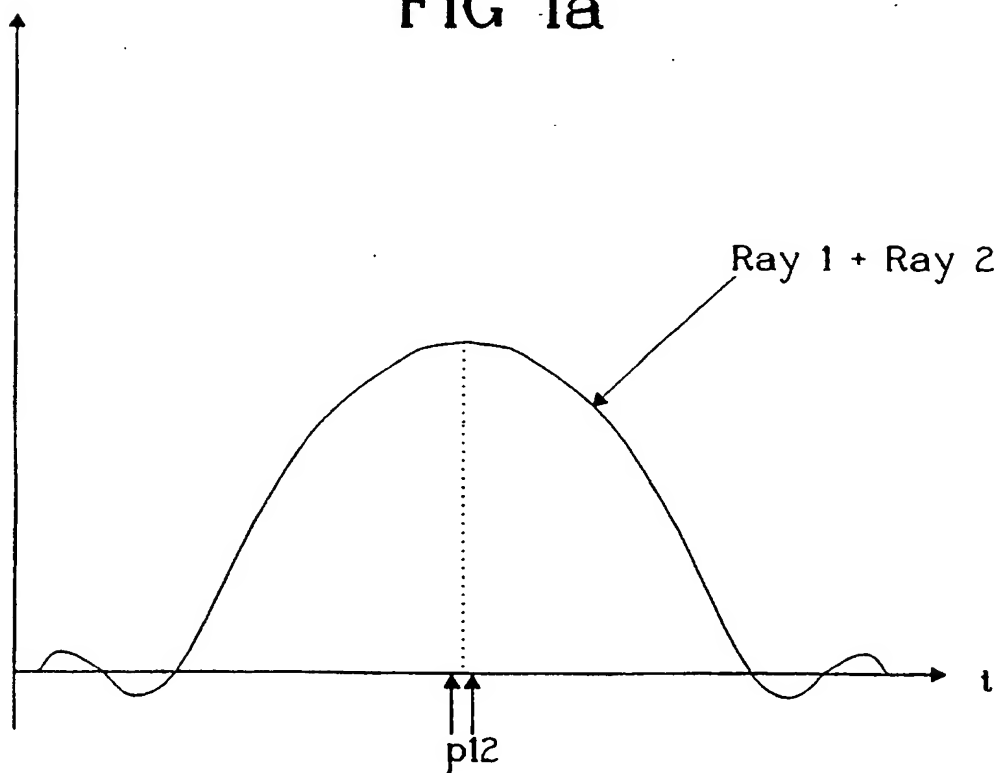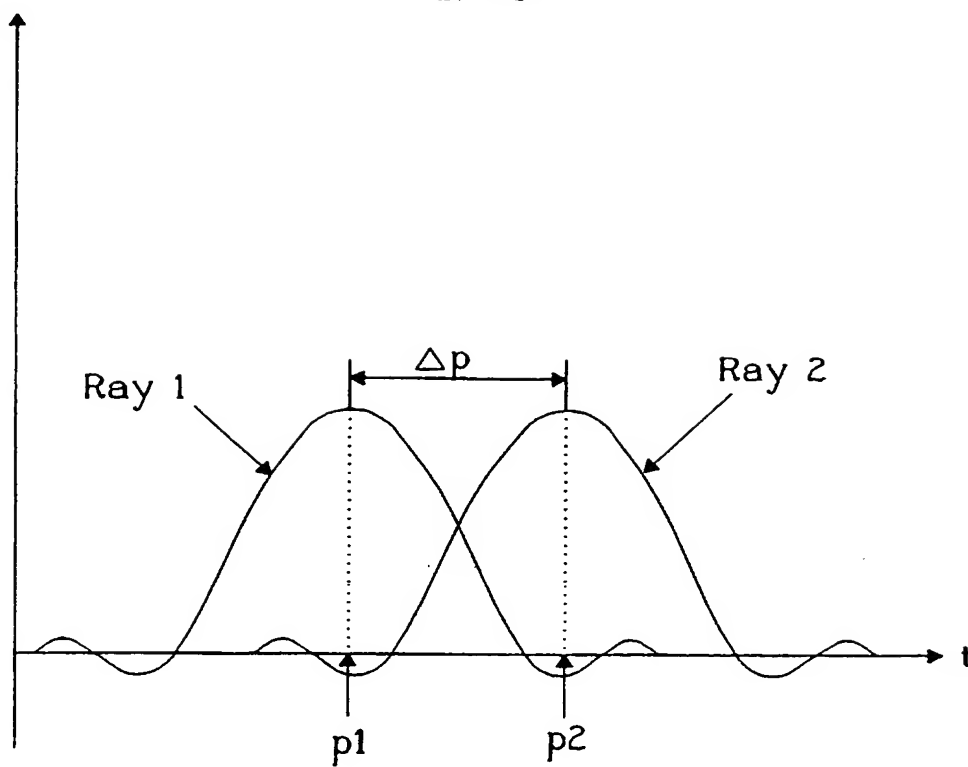

2/6


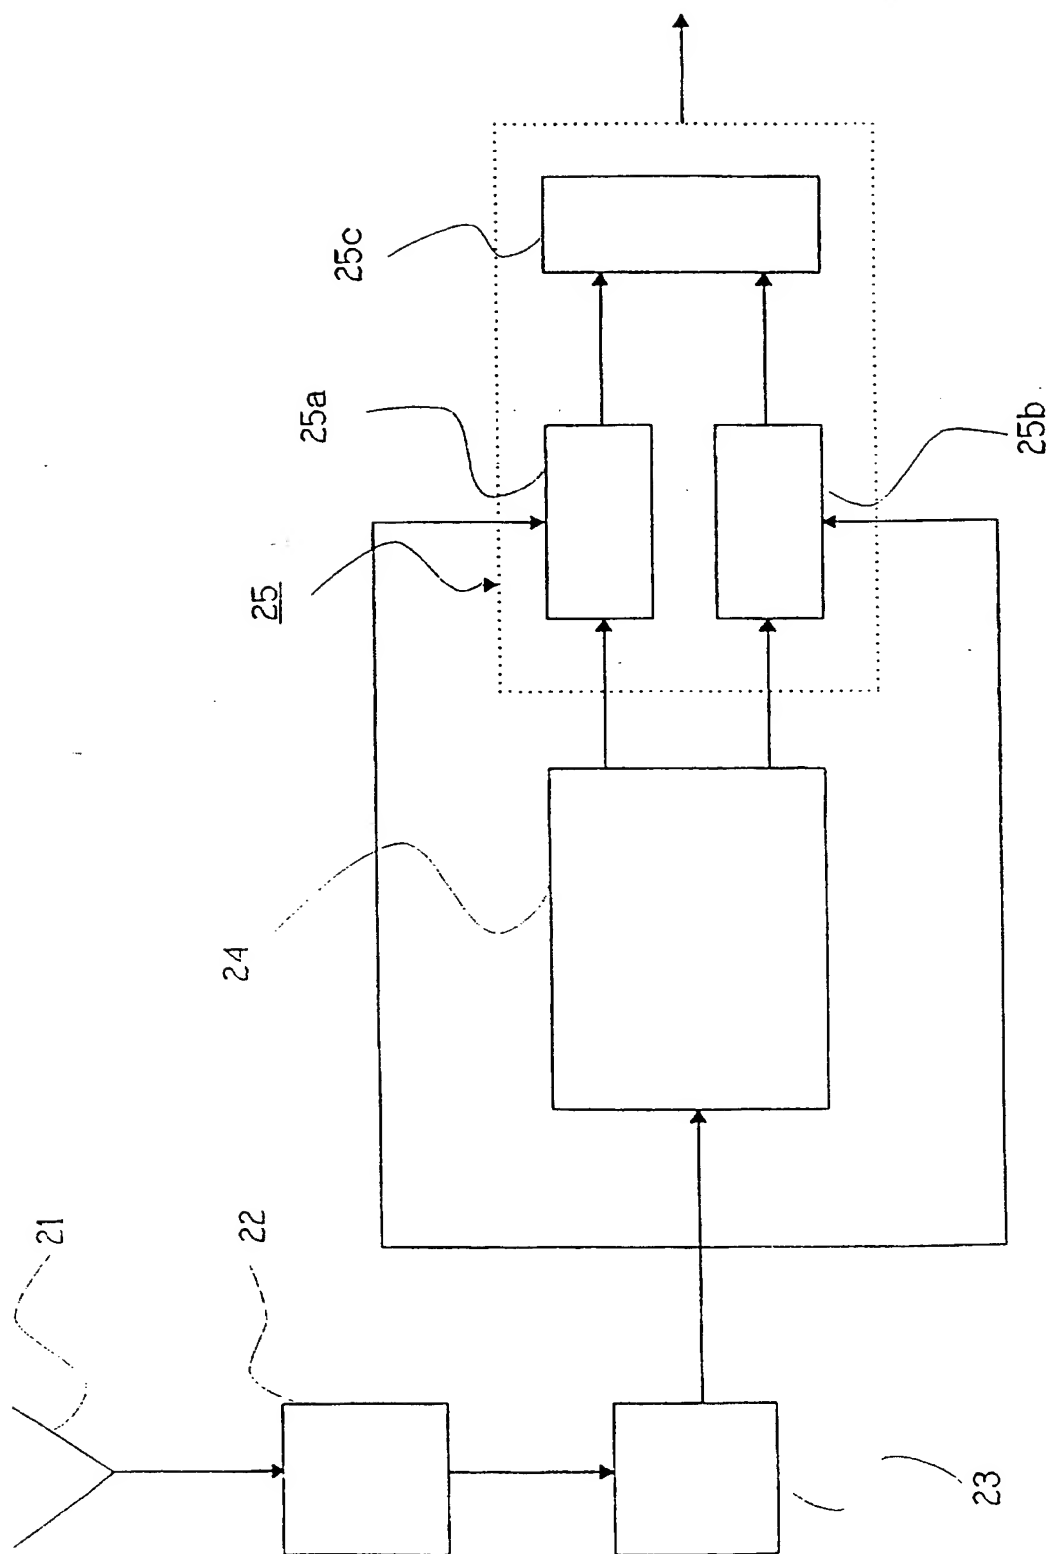


FIG 2

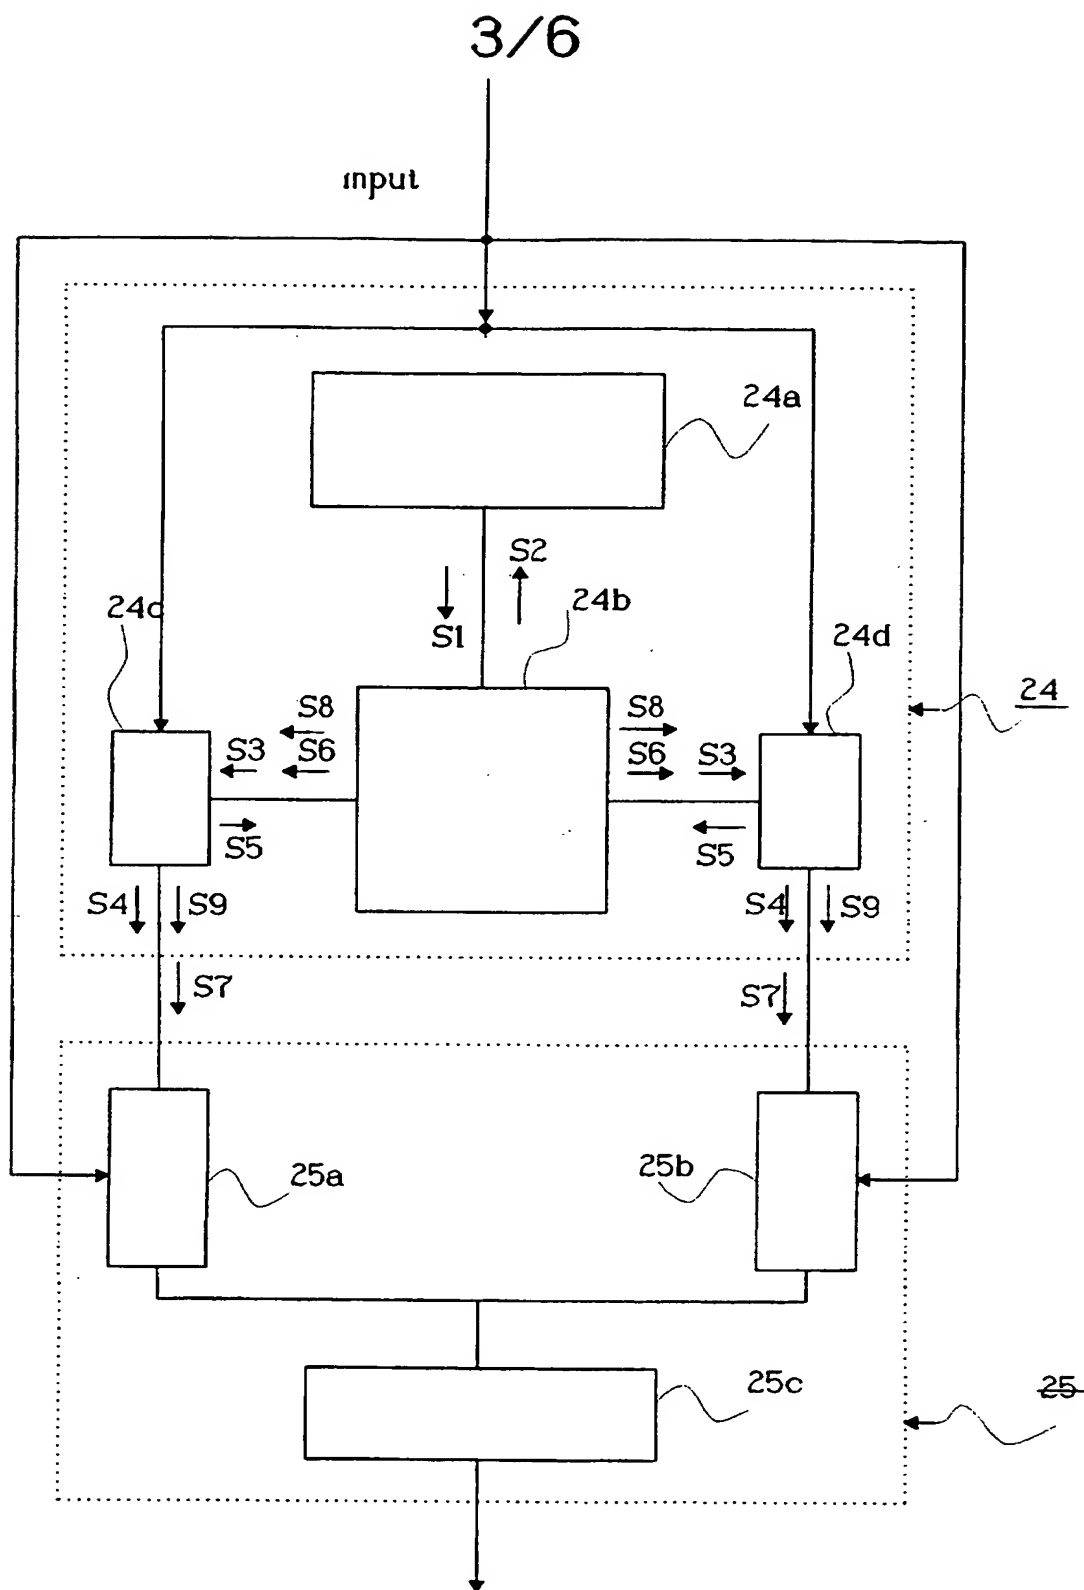

4/6

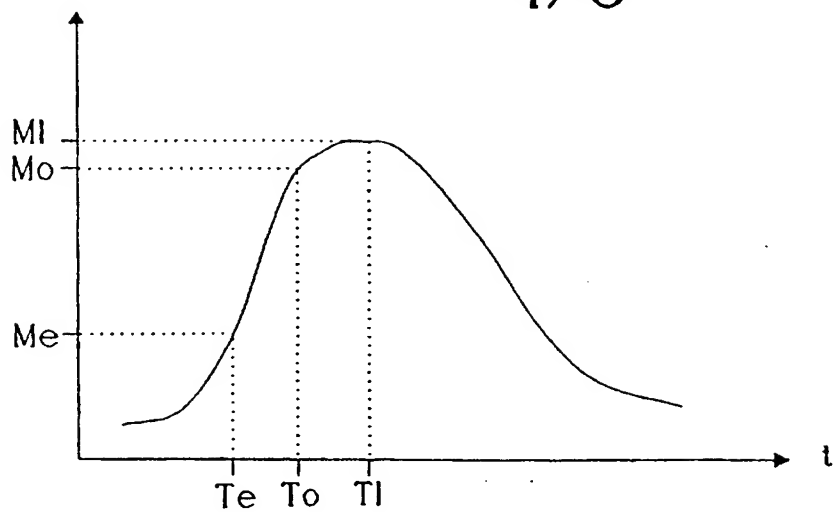


FIG 4a

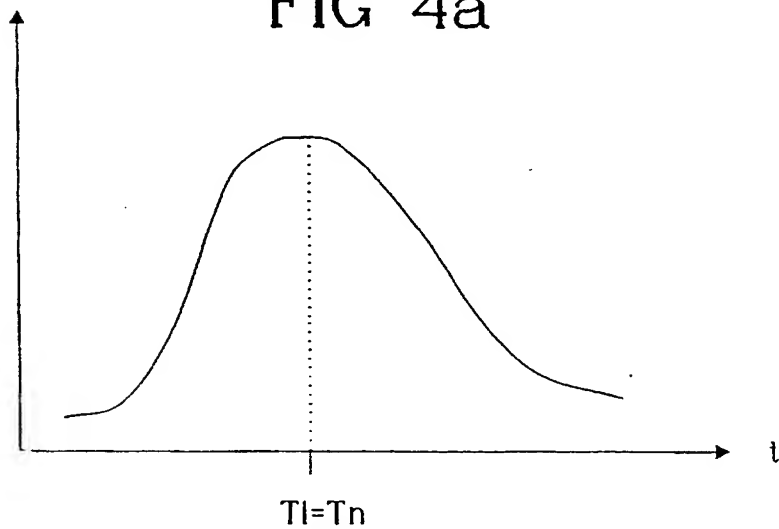


FIG 4b

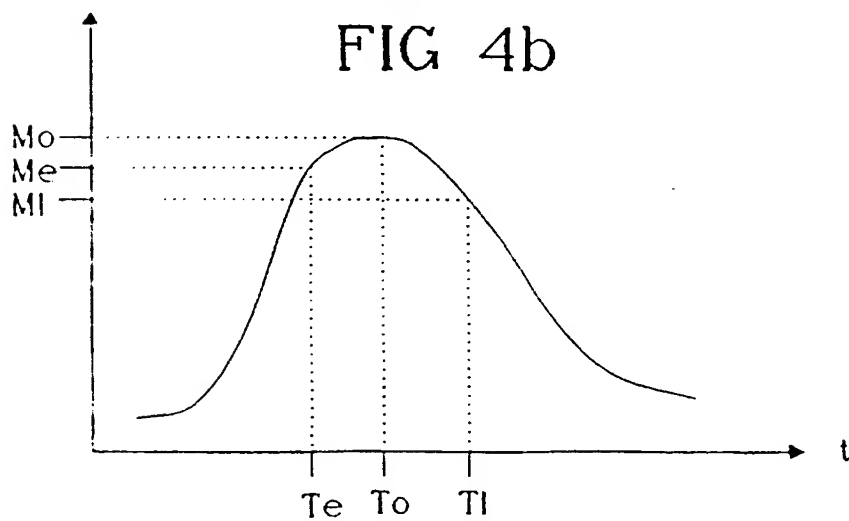


FIG 4c

5/6

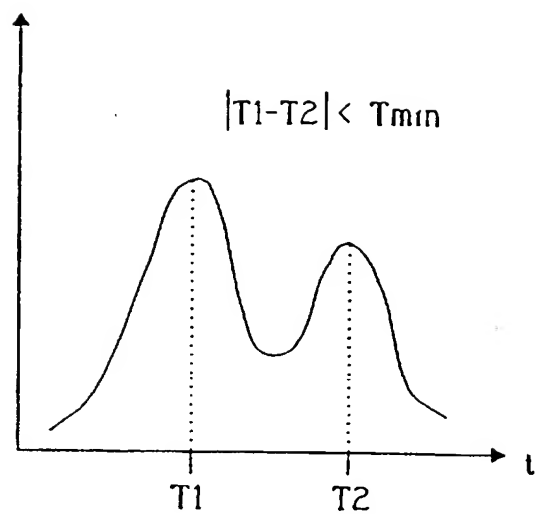


FIG 5a

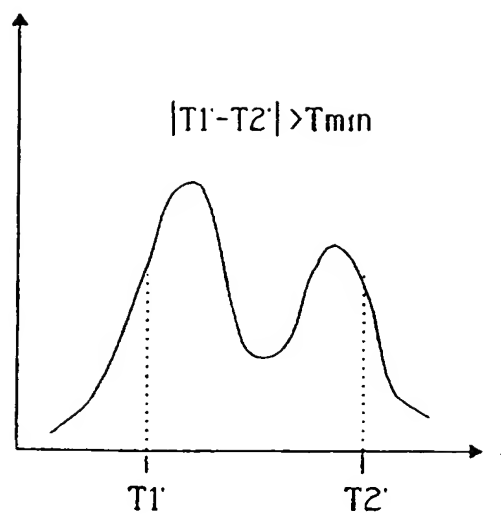


FIG 5b

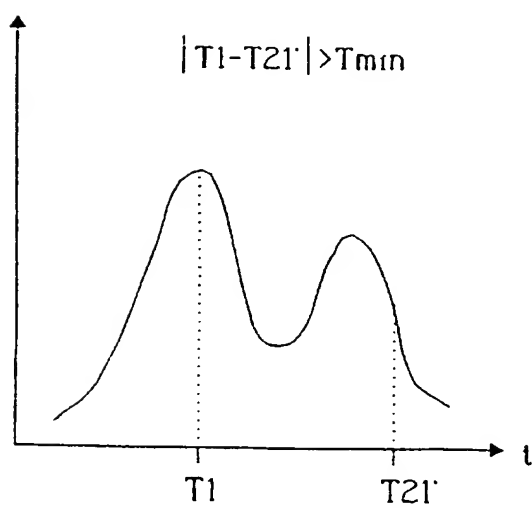


FIG 5c

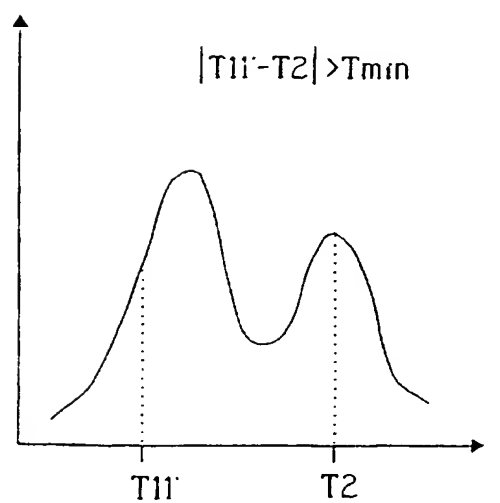


FIG 5d

6/6

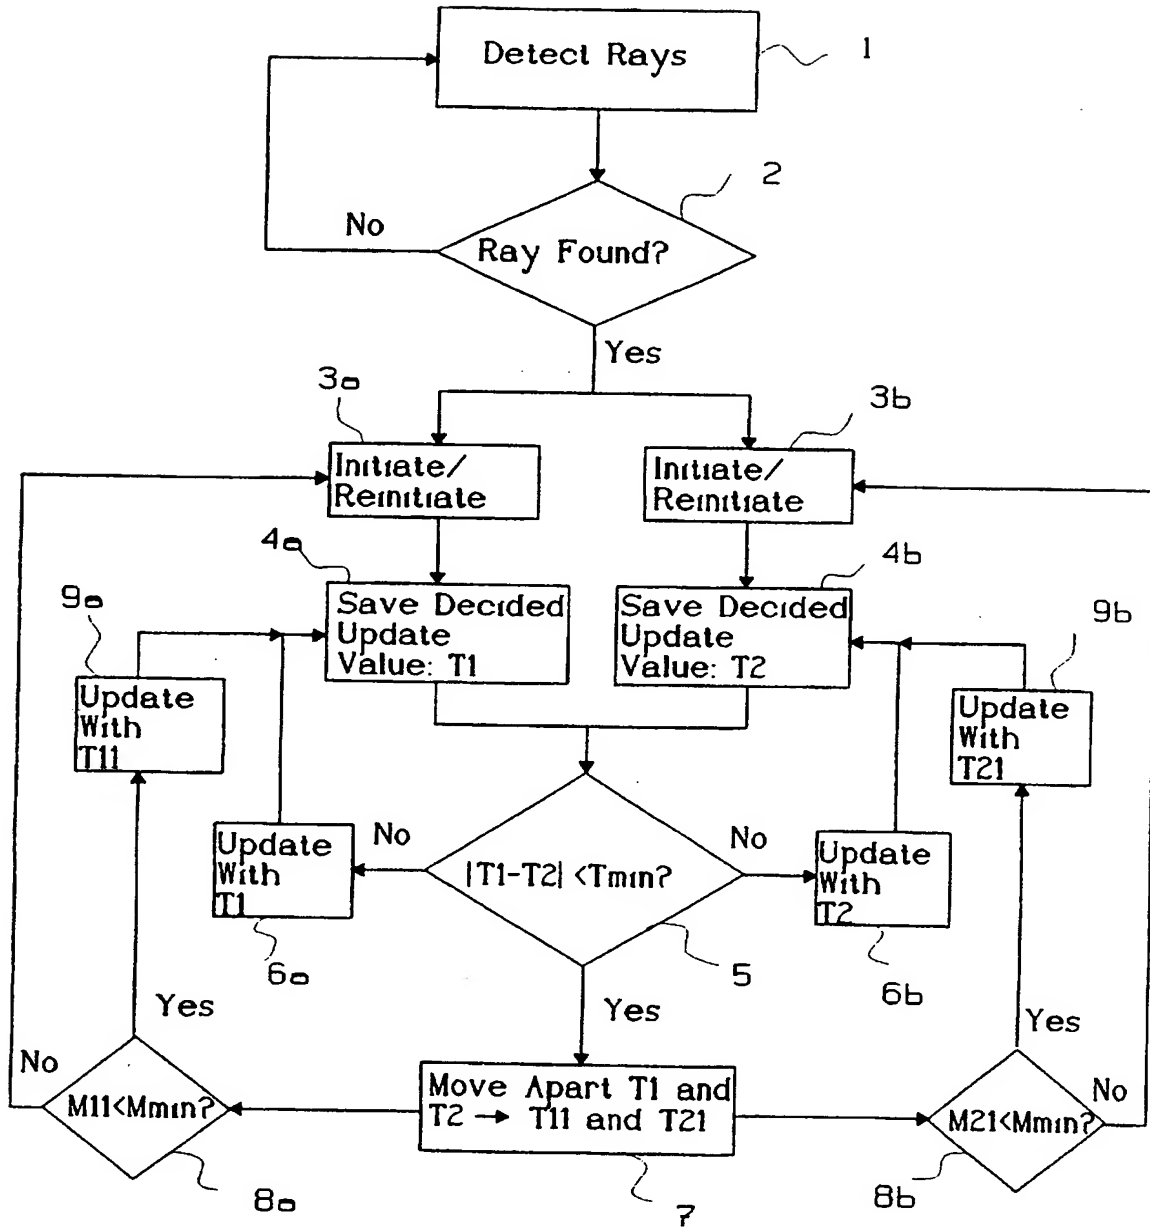


FIG 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00132

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 1/10, H04B 1/707

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0691754 A2 (NOKIA MOBILE PHONES LTD.), 10 January 1996 (10.01.96), column 4, line 25 - line 49; column 6, line 21 - line 48, abstract	1-15
	--	
A	GB 2291567 A (ROKE MANOR RESEARCH LIMITED), 24 January 1996 (24.01.96), abstract	1-15
	--	
	-----	

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

23 April 1997

Date of mailing of the international search report

08 -05- 1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Mikael Sollerhed

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/04/97

International application No.  
PCT/SE 97/00132

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0691754	A2	10/01/96	FI	943249 A	08/01/96
<hr/>						
GB	2291567	A	24/01/96	EP	0690588 A	03/01/96
				FI	953230 A	02/01/96
				GB	9413268 D	00/00/00
				JP	8056384 A	27/02/96
<hr/>						



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**